

TYPE: T16.O: 325 mm Wide x 175 mm High

Finned Element: 3 Qty. 75 mm x 75 mm & 3 Qty. 75mm x 35mm on 22 mm Ø pipe

Heat out put is calculated by the following formula:


Water Flow temperature °C + Return °C ÷ 2 minus Air in temperature = Watts Output per metre of active finned element.

Example: 80°C Flow + 60°C Return temperature = 140°C ÷ 2 = 70°C less air temperature 20°C = 50°C ΔT

Watts at 30°CΔT	Watts at 40°CΔT	Watts at 50°CΔT	Watts at 60°CΔT
222	334	438	550

*** Please note our units are tested to DIN EN 16430, test data available on request.**

FINNED ELEMENT BANK LAYOUT

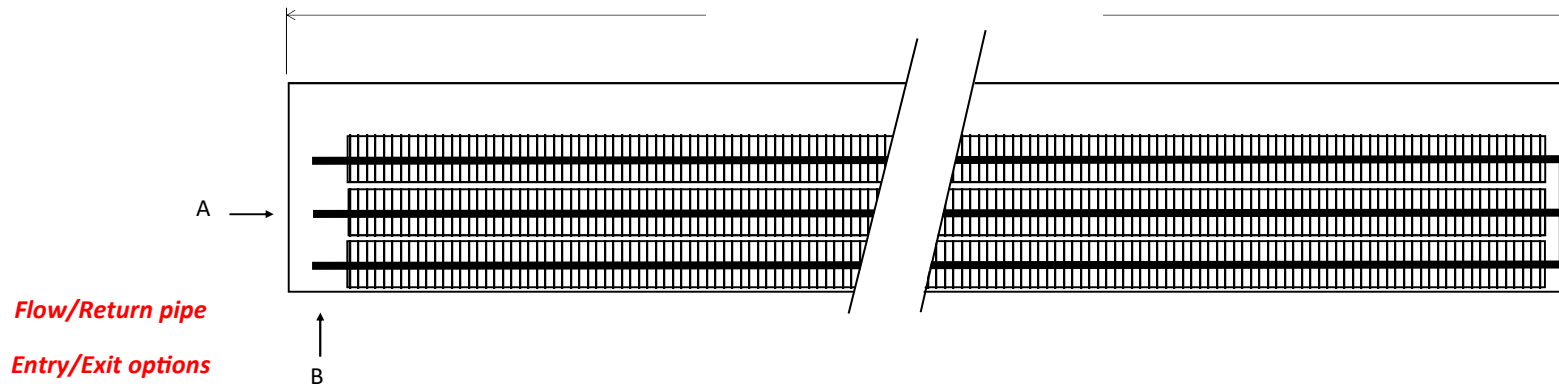

PLAN VIEW

AIR VENTS SUPPLIED LOOSE FOR EACH UNIT. ANY OTHER VALVES, CONTROLS TO BE SUPPLIED BY INSTALLER

PROJECT REFERENCE	
GRILLE	Natural Satin Anodised Aluminium
ANGLE	Natural Satin Anodised Aluminium
FINNED ELEMENT BANK	3 Qty: 75 mm x 75 mm & 3 Qty 75 mm x 35 mm
PIPE	22 mm Ø COPPER
TRENCH: WIDTH x HEIGHT	175 mm x 325 mm

Delivery address:

House No/Name:.....

Road:.....

Town/City:

Post Code:.....

Drawing Approval

Signature:.....

Date:.....



Unit 3, Pulloxhill Business Park
Greenfield Road Pulloxhill
Bedfordshire, MK45 5EU
Phone: 0044 (0) 1525 721431
Fax: 0044 (0) 1525 721428
Email: sales@trenchheating.com