

**TYPE: T9: 225 mm Wide x 185 mm High**

**Finned Element: 1 Qty. 108mm x 108mm on 22 mm Ø pipe**

Heat output is calculated by the following formula:


Water Flow temperature °C + Return °C ÷ 2 minus Air in temperature = Watts Output per metre of active finned element.

Example: 80°C Flow + 60°C Return temperature = 140°C ÷ 2 = 70°C less air temperature 20°C = 50°C ΔT

Watts at 30°CΔT	Watts at 40°CΔT	Watts at 50°CΔT	Watts at 60°CΔT
127	210	284	350

\* Please note our units are tested to DIN EN 16430, test data available on request.

### FINNED ELEMENT BANK LAYOUT

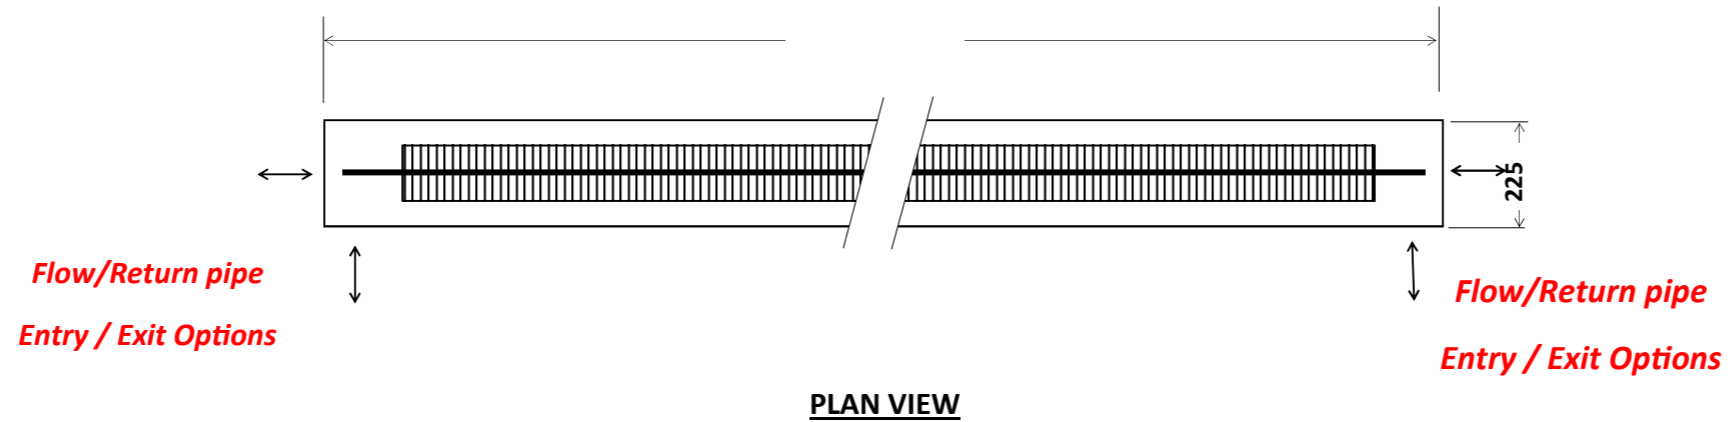

**AIR VENTS ARE SUPPLIED LOOSE. ANY OTHER VALVES, CONTROLS TO BE SUPPLIED BY INSTALLER**

PROJECT REFERENCE	
GRILLE	Natural Satin Anodised Aluminium
ANGLE	Natural Satin Anodised Aluminium
FINNED ELEMENT BANK	1 Qty: 108 mm x 108 mm
PIPE	22 mm Ø COPPER
TRENCH: WIDTH x HEIGHT	225 mm x 185 mm

**Delivery address:**  
 House No/Name:.....  
 Road:.....  
 Town/City: .....  
 Post Code:.....

**Drawing Approval**

Signature:.....  
 Date:.....



Unit 3, Pulloxhill Business Park  
 Greenfield Road Pulloxhill  
 Bedfordshire, MK45 5EU  
 Phone: 0044 (0) 1525 721431  
 Fax: 0044 (0) 1525 721428  
 Email: sales@trenchheating.com