

WINDOW/WALL

ROOM SIDE

RECOMMENDED INSTALLATION ALLOWANCE 170 mm

ANGLE FRAME

150 mm

CROSS BLADE GRILLE

FINISHED FLOOR LEVEL

BAFFLE PLATE

74 mm

FINNED ELEMENT

TYPE: T5.O-S1 150 mm Wide x 190High

Finned Element: 1 Qty. 75 mm x 75 mm & 1 Qty 75 mm x 50 mm on 22 mm ø pipe

UNCORRECTED Heat Output: 505 watts/metre of active Finned Element

CORRECTED Heat Output at 82/71°C & 20°C eat: 460 watts/metre of active Finned Element

CORRECTED Heat Output at 80/60°C & 20°C eat: 389 watts/metre of active Finned Element


200 mm - 230 mm

200 mm

M10 ADJUSTABLE FEET (30 mm MAX)

43.5 mm

FINNED ELEMENT BANK LAYOUT

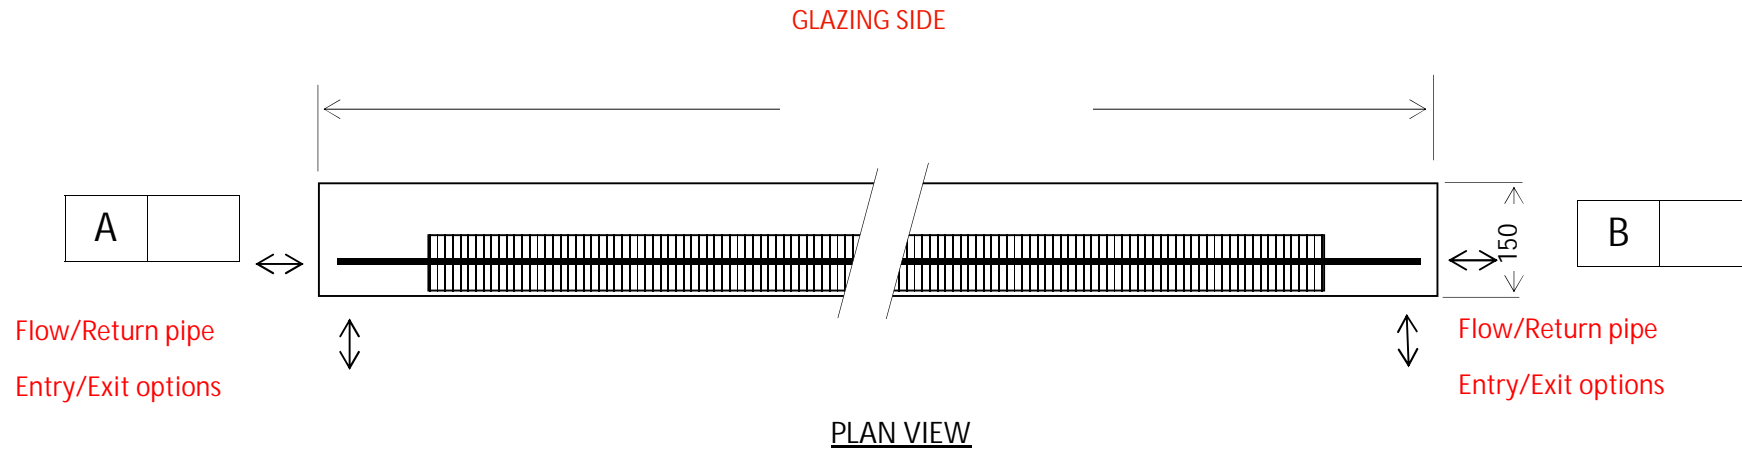

AIR VENTS ARE SUPPLIED LOOSE. ANY OTHER VALVES, CONTROLS TO BE SUPPLIED BY INSTALLER

PROJECT REFERENCE	
GRILLE	Natural Satin Anodised Aluminium
ANGLE	Natural Satin Anodised Aluminium
FINNED ELEMENT BANK	1 Qty: 75 mm x 75 mm & 1 Qty 75 mm x 50 mm
PIPE	22 mm Ø COPPER
TRENCH: WIDTH x HEIGHT	150 mm x 200 mm

Delivery address:

House No/Name:.....

Road:.....

Town/City:

Post Code:.....

Drawing Approval Please tick Option A or B

Signature:.....

Date:.....



Unit 3, Pulloxhill Business Park
Greenfield Road Pulloxhill
Bedfordshire, MK45 5EU
Phone: 0044 (0) 1525 721431
Fax: 0044 (0) 1525 721428
Email: sales@trenchheating.com