

TYPE: T15.V: 278 mm Wide x 325 mm High


Finned Element: 6 Qty. 75 mm x 75 mm on 22 mm \varnothing pipe

UNCORRECTED Heat Output: 1527 watts/metre of active Finned Element

CORRECTED Heat Output at 82/71°C & 20°C eat: 1390 watts/metre of active Finned Element

CORRECTED Heat Output at 80/60°C & 20°C eat: 1175 watts/metre of active Finned Element

FINNED ELEMENT BANK LAYOUT

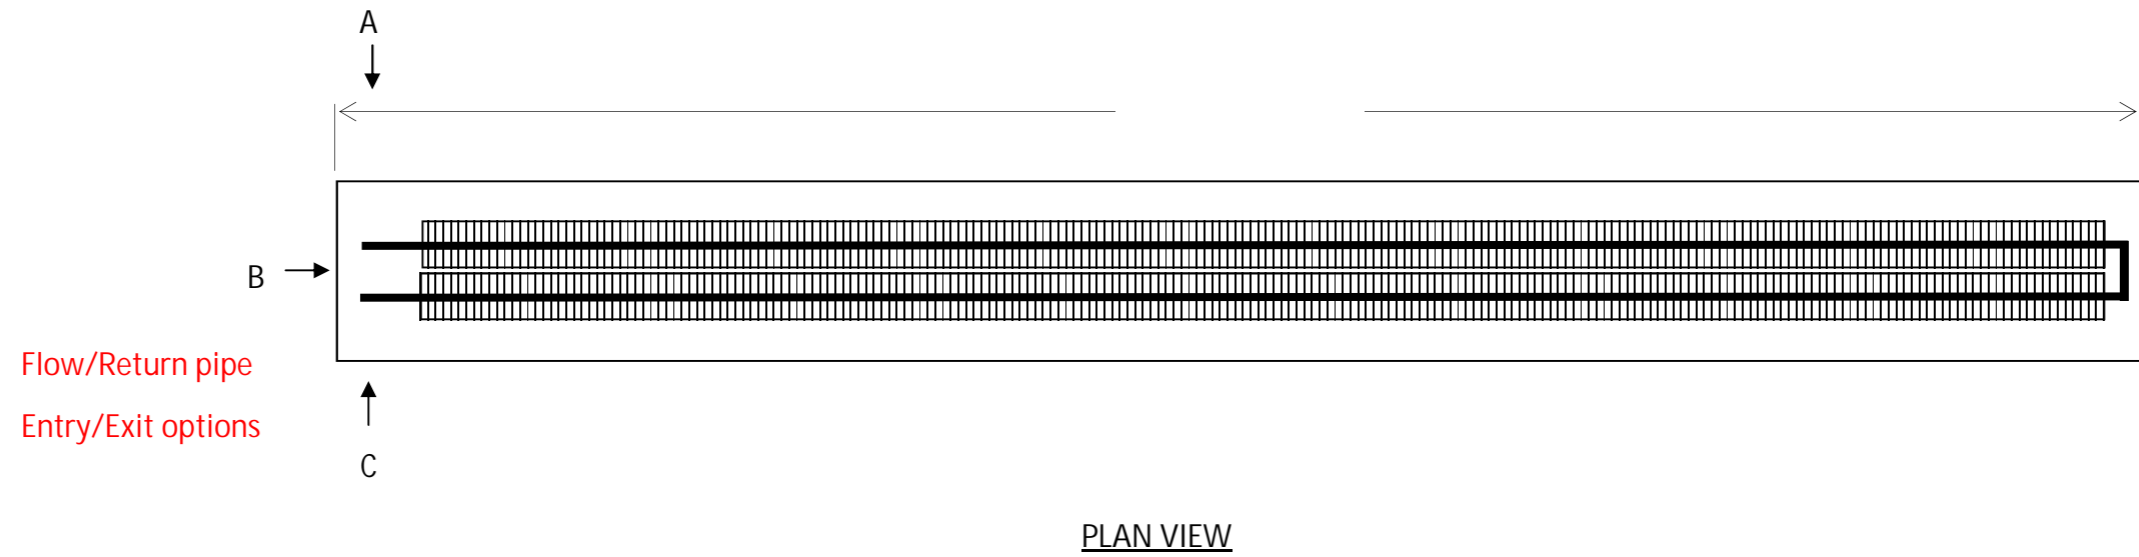

AIR VENTS ARE SUPPLIED LOOSE FOR EACH UNIT. ANY OTHER VALVES, CONTROLS TO BE SUPPLIED BY INSTALLER

PROJECT REFERENCE	
GRILLE	Natural Satin Anodised Aluminium
ANGLE	Natural Satin Anodised Aluminium
FINNED ELEMENT BANK	6 Qty: 75 mm x 75 mm
PIPE	22 mm Ø COPPER
TRENCH: WIDTH x HEIGHT	278 mm x 325 mm

Delivery address:

House No/Name:

Road:

Town/City:

Post Code:

Drawing Approval. Please tick Flow/return Option A or B

Signature:

Date:



Unit 3, Pulloxhill Business Park
 Greenfield Road Pulloxhill
 Bedfordshire, MK45 5EU
 Phone: 0044 (0) 1525 721431
 Fax: 0044 (0) 1525 721428
 Email: sales@trenchheating.com